

ROTO-RUNNER


RR-300

Milling machine for asphalt and concrete

The compact and light-weight manufacturing of the RR-300 allows easy transportation.

RR-300-D

- Scarifying of old surfaces (concrete and asphalt)
- Preparing of streets and pavements
- Milling and scarifying right to edges
- Removing of markings and thermoplastics

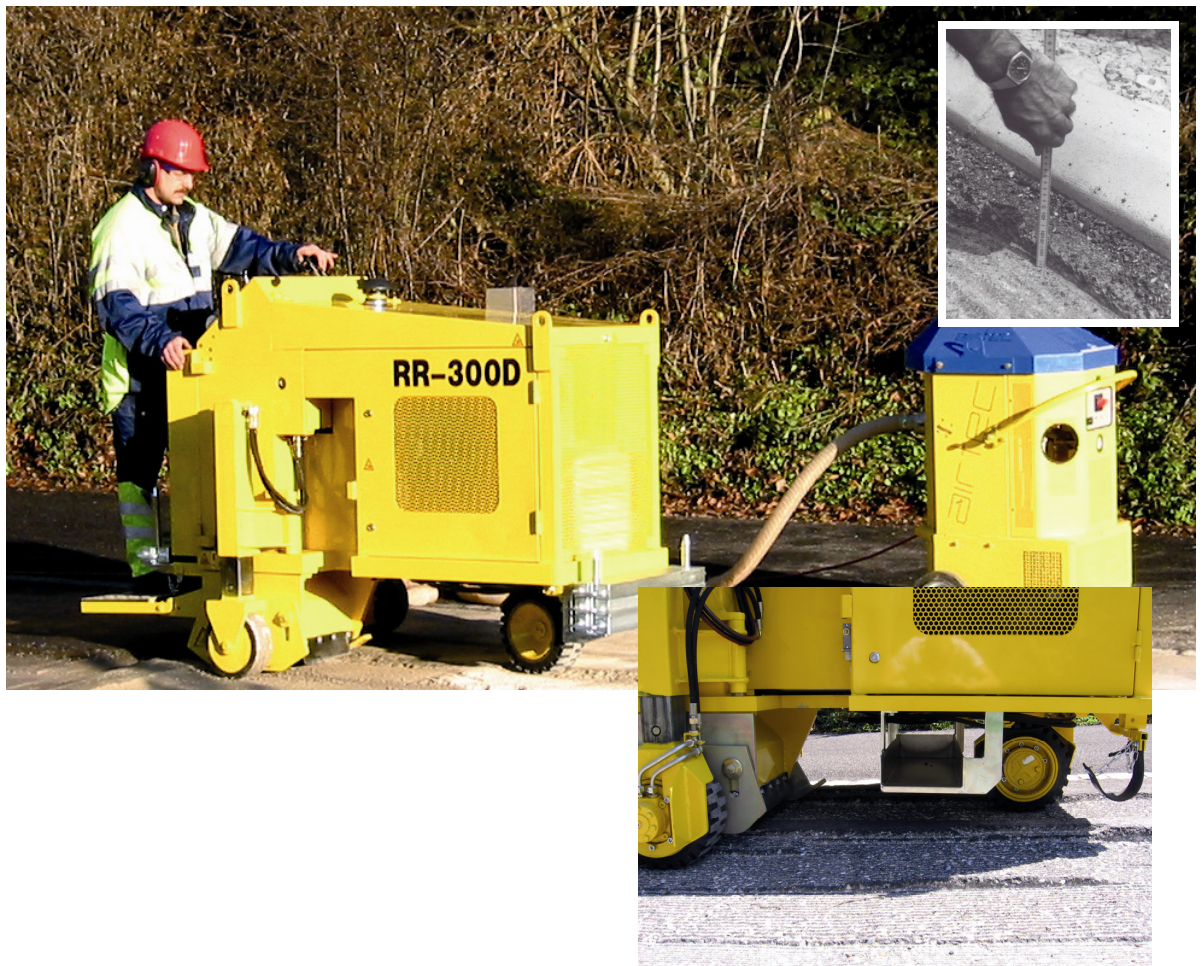

ROTO-RUNNER

RR-300




The heart of the RR-300 is the solid drum body with mounted tungsten chisels.

Milling drums for many different surfaces can be used on the RR-300. The Fine-Milling-Drum allows an optimal removal of markings.



The detailed control-board allows an easy handling of the milling machine RR-300. For example: milling depth and engine speed can be easily adjusted.

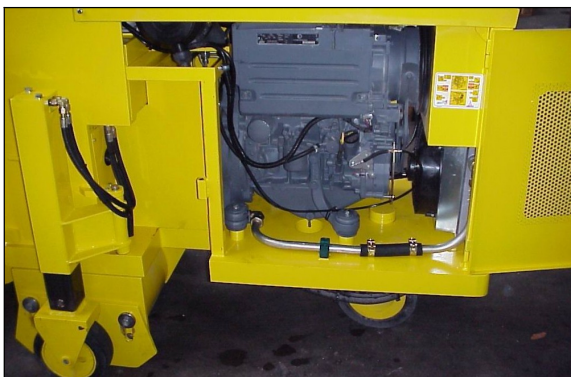

The motor tools are easy to access.

The compact and light-weight building allows a fast and uncomplicated transport.

Wheels

Front (ø x W, mm) 310 x 120

Rear (ø x W, mm) 260 x 85

Technical Dates

Motor	DEUTZ Dieselmotor	Milling width	max. 300mm
Type	FO3L2011	Milling depth	0-60mm (Surface depending)
Cooling	air / oil	Milling drum Ø	300mm, with chisels
Cylinder	3		200mm, without chisels
Fuel tank	30l	Chisels	depending on drum
Water tank	80l	Total weight	1800 kg
Hydraulic tank	40l	Front axle load	750 kg
Ground clearance	90mm	Rear axle load	1150 kg